
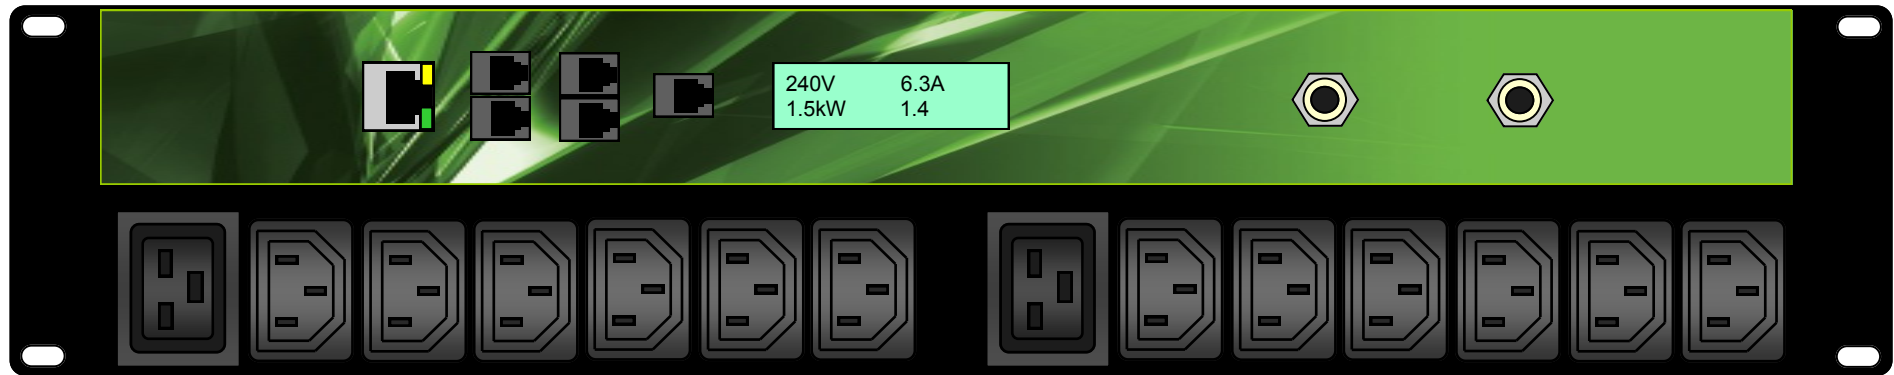


# IPL-002-0G-3C 2U Horizontal 12 x C13 2 x C19 Neutrik 32A panel mount - 3mtr 32A Lead.

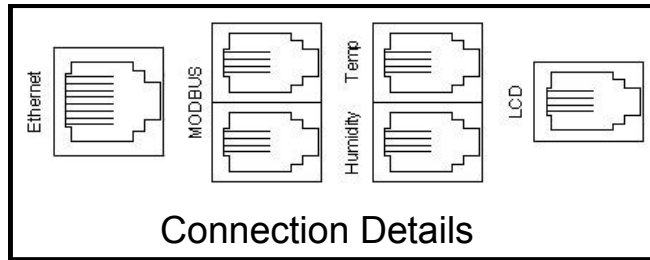

Provided with with 3 metre lead 3x4.0mm<sup>2</sup> HO7 Cable Neutrik 32Amp to IEC309 32Amp Commando Part Number IPL-PL32/3. Other lengths and terminations are available.

**Body Dimensions:** 88.6mm wide x 56mm deep x 482.6mm  
**Fixing Centres:** 465 mm  
**Material:** Mild Steel  
**Finish:** Black powder coat  
**Fixing Method:** End Brackets  
**Protection:** Thermal Trip per group of 6C13 1C19  
**Indicator:** Button on Trip  
**Earthing:** M6 Earth stud to end  
**Rating:** 32A @ 240v AC  
**Special Requirements:** None

**Input:** Neutrik 32Amp Chassis Connector  
**Output:** 12 x C13 2 x C19  
**Fuse Rating:** 6C13 & 1C19 @ 20Amp As standard  
**Estimated weight:** 4 Kg  
**Standards:** Manufactured in accordance with BS EN 60950-1  
**WEEE:** Compliant  
**RoHS:** Compliant  
**CE:** Compliant  
**Max Op Temperature:** -10° to +50°C



2U 12 x C13 & 2 x C19

Rev :-

IMC

**DO NOT SCALE**

© 2015 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

021115