




IPL-003-IP1-3C Vertical 12 x C13 2 x C19 32Amp

4 Position End Bracket

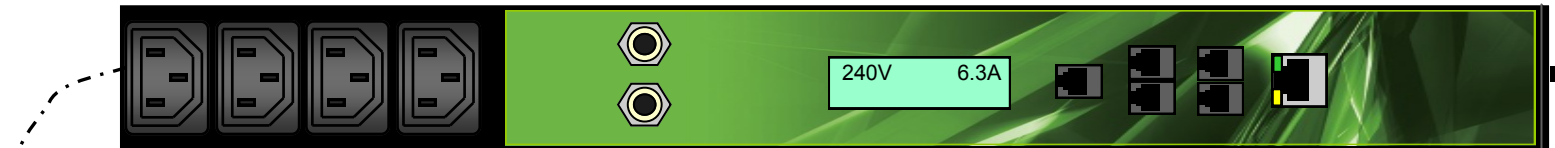

Connection Details

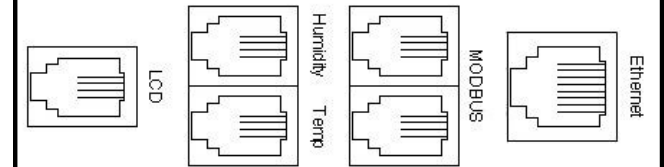


4 Position End Bracket Location Pip & M5 Screw Fixing. Each End

Provided with with 3 metre lead 3x4.0mm² HO7 Cable Neutrik 32Amp to IEC309 32Amp Commando Part Number IPL-PL32/3. Other lengths and terminations are available.

Body Dimensions:	44.5mm wide x 56mm deep x 992mm o/a
Fixing Centres:	21U
Material:	Mild Steel
Finish:	Black powder coat
Fixing Method:	End Brackets
Protection:	Thermal Trip per 6C13 1C19
Indicator:	Button on Trip
Earthing:	M6 Earth stud to end
Rating:	32A @ 240v AC
Special Requirements:	Bottom Entry

Input:	Neutrik 32Amp Chassis Connector
Output:	12x C13 2x C19
Fuse Rating:	20Amp Thermal Trip
Estimated weight:	4.8kg
Standards:	Manufactured in accordance with BS EN 60950-1
WEEE:	Compliant
RoHS:	Compliant
CE:	Compliant
Max Op Temperature:	-10° to +50°C



SlimVert 12 x C13 2 x C19

Rev :-	IMC
	021115

DO NOT SCALE

© 2015 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.