


# IPL-004-IP1-3C Vertical 24 x C13 4 x C19 32Amp

4 Position End Bracket



## Connection Details

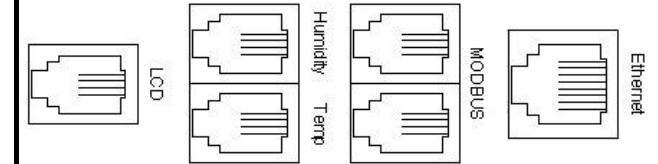

4 Position End Bracket Location Pip & M5 Screw Fixing. Each End

Provided with with 3 metre lead 3x4.0mm<sup>2</sup> HO7 Cable Neutrik 32Amp to IEC309 32Amp Commando Part Number IPL-PL32/3. Other lengths and terminations are available.

**Body Dimensions:** 44.5mm wide x 56mm deep x 1402mm o/a  
**Fixing Centres:** 30/31U  
**Material:** Mild Steel  
**Finish:** Black powder coat  
**Fixing Method:** End Brackets  
**Protection:** Thermal Trip per 12C13 2C19  
**Indicator:** Button on Trip  
**Earthing:** M6 Earth stud to end  
**Rating:** 32A @ 240v AC  
**Special Requirements:** Bottom Entry

**Input:** Neutrik 32Amp Chassis Connector  
**Output:** 24x C13 4x C19  
**Fuse Rating:** 20Amp Thermal Trip  
**Estimated weight:** 5.8kg  
**Standards:** Manufactured in accordance with BS EN 60950-1  
**WEEE:** Compliant  
**RoHS:** Compliant  
**CE:** Compliant  
**Max Op Temperature:** -10° to +50°C



SlimVert 24 x C13 4 x C19

Rev :-

IMC

**DO NOT SCALE**

© 2015 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

021115