
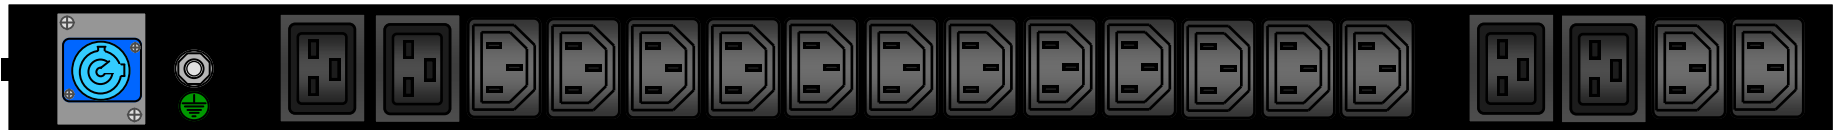



IPL-004-IP1-3B Vertical 24 x C13 4 x C19 16Amp

4 Position End Bracket

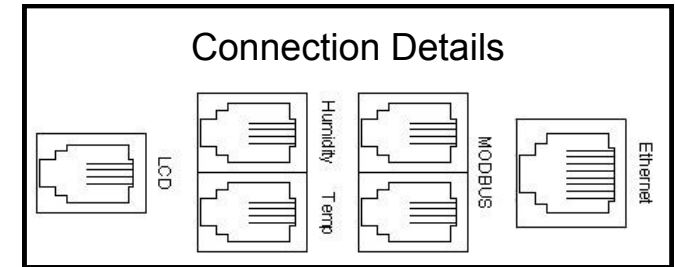

4 Position End Bracket Location Pip & M5 Screw Fixing. Each End

Provided with with 3 metre lead 3x2.5mm² HO7 Cable Neutrik 16Amp to IEC309 16Amp Commando Part Number IPL-PL16/3. Other lengths and terminations are available.

Body Dimensions: 44.5mm wide x 56mm deep x 1402mm o/a
Fixing Centres: 30/31U
Material: Mild Steel
Finish: Black powder coat
Fixing Method: End Brackets
Protection:
Indicator:
Earthing: M6 Earth stud to end
Rating: 16A @ 240v AC
Special Requirements: Bottom Entry

Input: Neutrik 16Amp Chassis Connector
Output: 24x C13 4x C19
Fuse Rating:
Estimated weight: 5.8kg
Standards: Manufactured in accordance with BS EN 60950-1
WEEE: Compliant
RoHS: Compliant
CE: Compliant
Max Op Temperature: -10° to +50°C



SlimVert 24 x C13 4 x C19

Rev :-

IMC

DO NOT SCALE

© 2015 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

021115